


Holographic Vitra Series

Surreal and Dreamy Real and Invisible

Application scenarios


- Retail Industry: Shopping mall atrium, Restaurant & Retail shop window
- Business Activities: Conference rooms, Trade fairs, Concerts
- Interactive Entertainment: Enterprise buildings, 4S stores, Amusement parks, Airports, High-speed rail

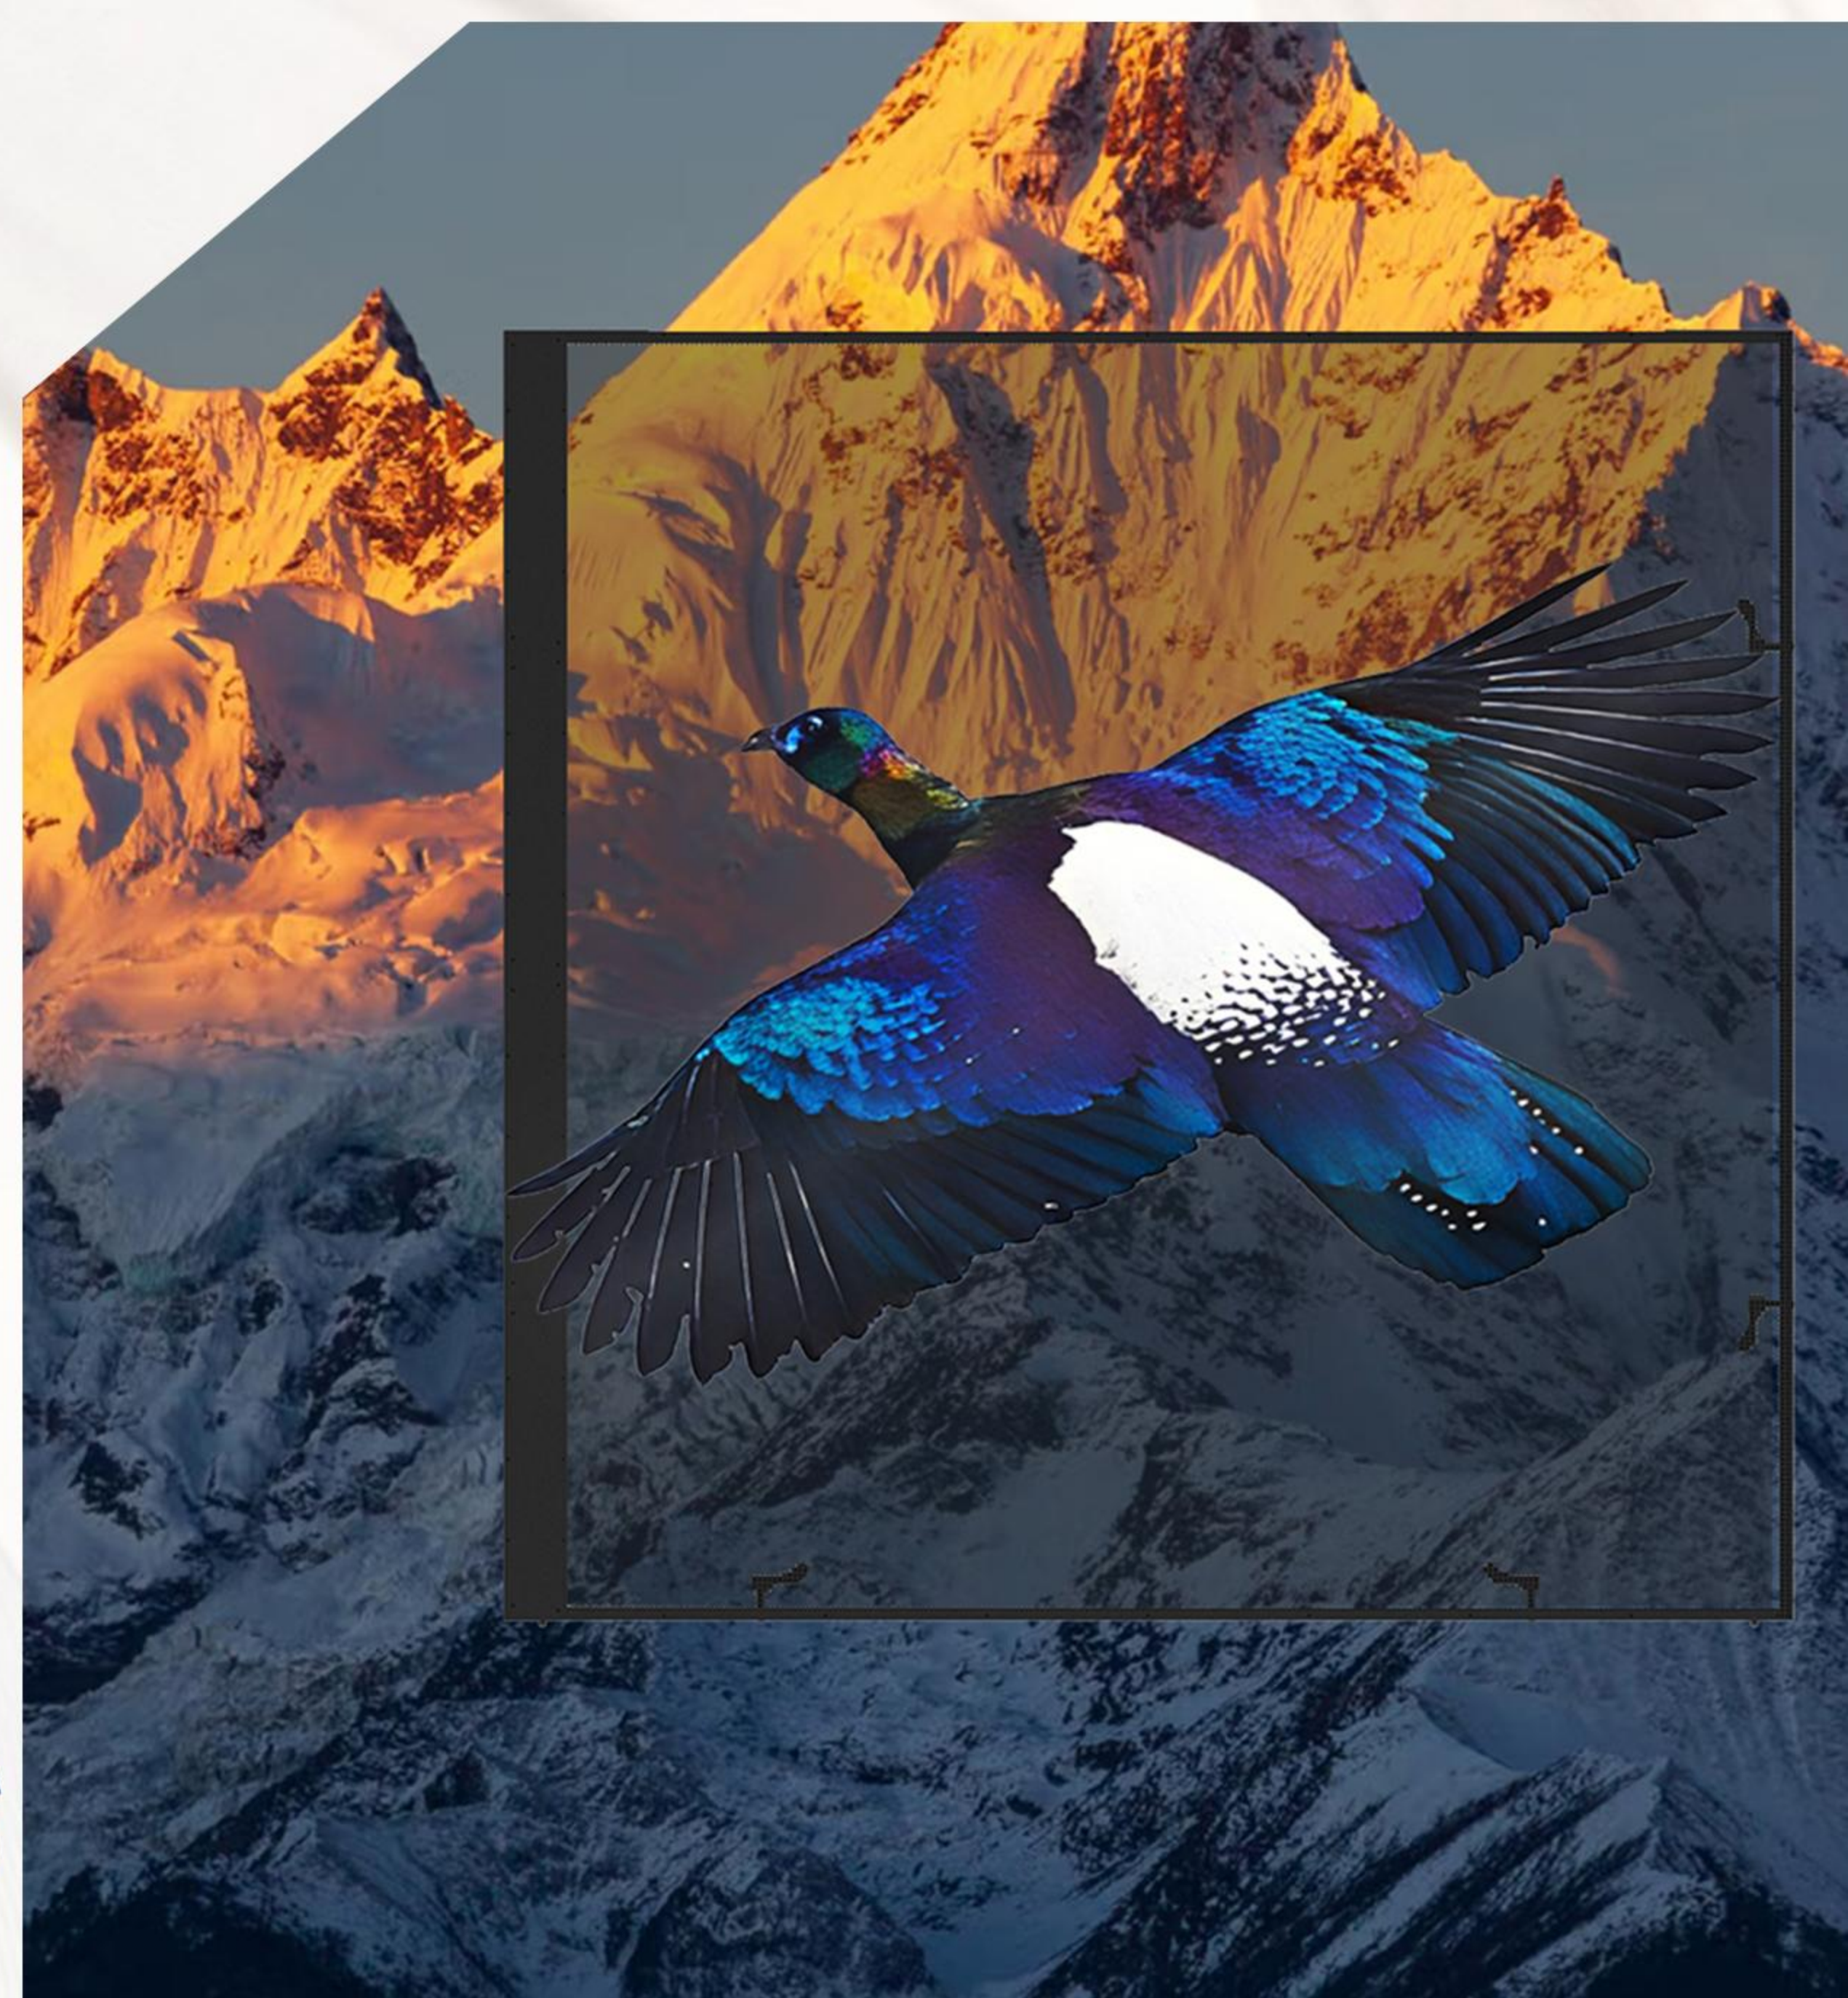

Features



Seamless visuals for a connected world
Seamless
visuals for a connected world

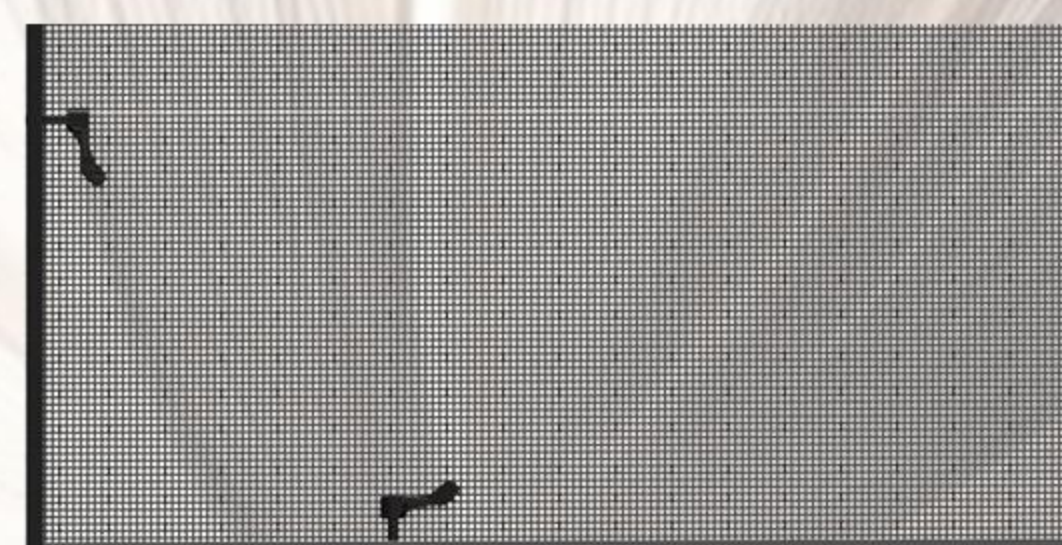


Quick lock and positioning column make product assembly convenient and quick.



Network cable and wire in one

Specification

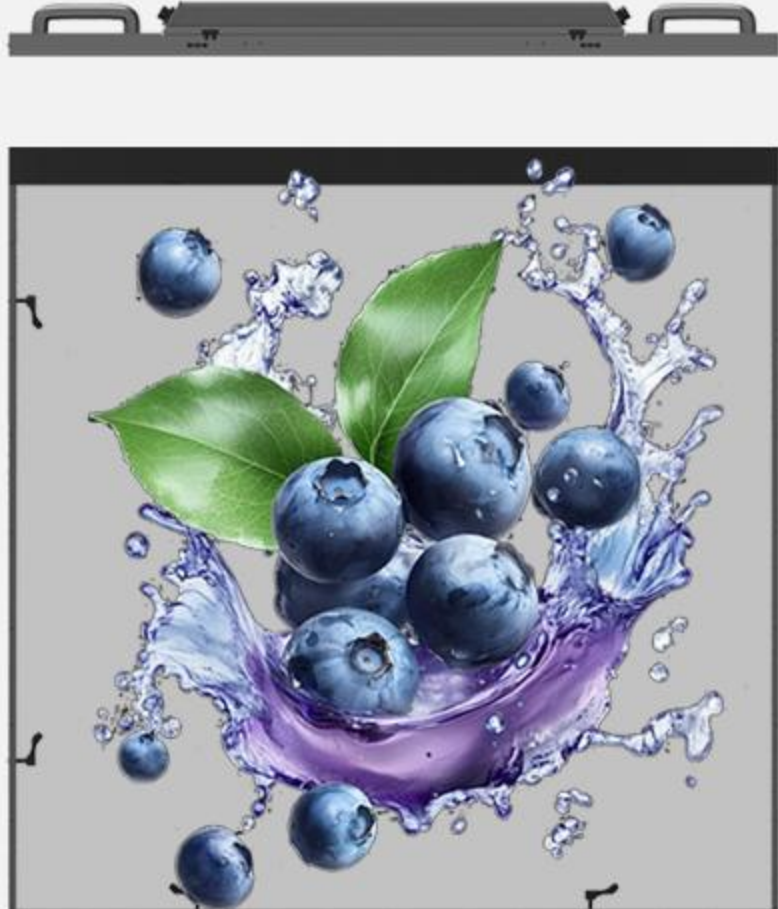Module		
Pixel Pitch	Horizontal:3.91mm/Vertical:3.91mm	
Pixel Density	65536dot/m²	
Visual Transparency	70%	
Module Size	1000mm×250mm	
Overall ModuleSize	1000mm×500mm×73mm	1000mm×1000mm×73mm
LED Type	SMD1921	
Weight	3.5KG	7KG
Resolution Ratio	256×128pix	256×256pix
LED Control System	Synchronous/Asynchronous	
Brightness	White balance brightness 4500cd/㎡	
Viewing Angle	Horizontal 160,Vertical 140	
Display Thickness	2.7MM	
Scanning	16 scans	
Average	≥100000 hours	
Gray Scale	≥16(bit)	
White FieldColor	5500K-15000K(adjustable)	
Drive Mode	Static	
Atenuation Rate	2 years below 0.05%	
Lifespan	≥100,000.00 hours	
MaximumPower	520W/m²	
Average Power Consumption	180W/m²	
Power Supply Requirements	200V~240V±10%;AC50HZ,three-phase five-wire	
Operation Temperature	0℃ ~+60℃ '	
Working Humidity	20%RH~85%RH,no condensation	
Storage Temperature	'-20℃ ~+65℃ '	
Storage	10%RH~ 85%RH,no condensation	
Installation Method	Wall mount installation,glass adhesive,hanging,stacking,suitable for curvedinstallations,supports cutting to any size	
Packaging Method	Cardboard Case/Plywood Case/Flight Case	

Declaration: The relevant parameters in the table are updated in real time, and the data is for reference only. No further notice will be given if there are any upgrades.

