

Holographic DualView Series

Double Impact, Infinite Vision

Application scenarios


- Retail Industry: Shopping mall atrium, Restaurant & Retail shop window
- Business Activities: Conference rooms, Trade fairs, Concerts
- Interactive Entertainment: Enterprise buildings, 4S stores, Amusement parks, Airports, High-speed rail



Features



One Screen, Dual Sides, Infinite Creativity

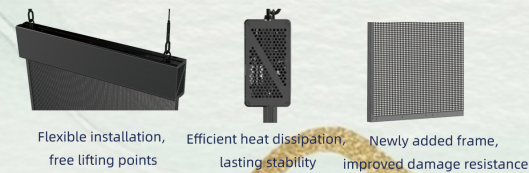

Flexible installation,
free lifting points

Efficient heat dissipation,
lasting stability

Newly added frame,
improved damage resistance

See the Unseen Beyond the Screen

DualView Series Specification (Integrated light drive)						
Model	55"		65"		70"	
Pixel Pitch	2.9 mm	3.91 mm	2.9 mm	3.91 mm	2.9 mm	3.91 mm
Pixel Density	112, 896 dot/ m ²	65, 536 dot/ m ²	112, 896 dot/ m ²	65, 536 dot/ m ²	112, 896 dot/ m ²	65, 536 dot/ m ²
Visual Transparency	70%	80%	70%	80%	70%	80%
Module Size	750 mm × 1200 mm		750 mm × 1500 mm		1000 mm × 1500 mm	
Overall Module Size	783mm×1329mm×78mm		783mm×1629mm×78mm		1033mm×1629mm×78mm	
LED Type	1818	2121	1818	2121	1818	2121
Weight (Banner / Totem Type)	14.5 kg / 18.5 kg	11.5 kg / 15.5 kg	17.5 kg / 21.5 kg	13 kg / 17 kg	19.6 kg / 23.6 kg	17 kg / 21 kg
Resolution Ratio	252 × 392 pix	192 × 300 pix	252 × 492 pix	192 × 376 pix	336 × 492pix	256 × 376 pix
LED Control System	Synchronous / Asynchronous					
Brightness	2000 nits	3500 nits	2000 nits	3500 nits	2000 nits	3500 nits
Viewing Angle	Horizontal 160, Vertical 140					
Display Thickness	3 mm	3.6 mm	3 mm	3.6 mm	3 mm	3.6 mm
Playback Control	NOVA T50 / Colorlight input:HDMI、WiFi、Bluetooth, Built-in Playback System, 32GB of storage, Cloud Management					
Resumable Transmission	√					
Average Lifespan	≥ 100,000 hours					
Gray Scale	≥16 bit					
White Field Color Temperature	5,500 K - 15,000 K (adjustable)					
Atenuation Rate	2 years below 0.05%					
Average Fault-Free Working Time	≥ 100,000 hours					
Power Consumption Max/Average	725 w/m ² / 285 w/m ²	1176 w/ m ² / 294 w/m ²	783 w/m ² / 308 w/m ²	1160 w/ m ² / 290 w/m ²	783 w/m ² / 308 w/m ²	1160 w/ m ² / 290 w/m ²
Operation Temperature	-20℃~+50℃					
Working Humidity	20% RH ~ 85% RH, no condensation					
Storage Temperature	-20℃~+60℃					
Storage Humidity	10%RH~85%RH, no condensation					
Installation Method	Hanging / Floor Stacking					
Packaging Method	Cardboard Case/ Plywood Case / Flight Case					
Certifications	CE, FCC, ETL, RoHS					

Declaration: The relevant parameters in the table are updated in real time, and the data is for reference only. No further notice will be given if there are any upgrades.

InVisia Displays Co., Ltd | See the Unseen Beyond the Screen

Address : 5th Floor, Building 9, Hengchangrong High-Tech Industrial Park, Bao'an District, Shenzhen 518128, China

Website : www.invisiadisplays.com Email : hello@invisiadisplays.com Tel : + 86 190 6808 8230

Scan to Connect



WhatsApp

Wechat