


Holographic T Series

Pure Transparency, Infinite Vision

Application scenarios

- Retail Industry: Shopping mall atrium, Restaurant & Retail shop window
- Business Activities: Conference rooms, Trade fairs, Concerts
- Interactive Entertainment: Enterprise buildings, 4S stores, Amusement parks, Airports, High-speed rail

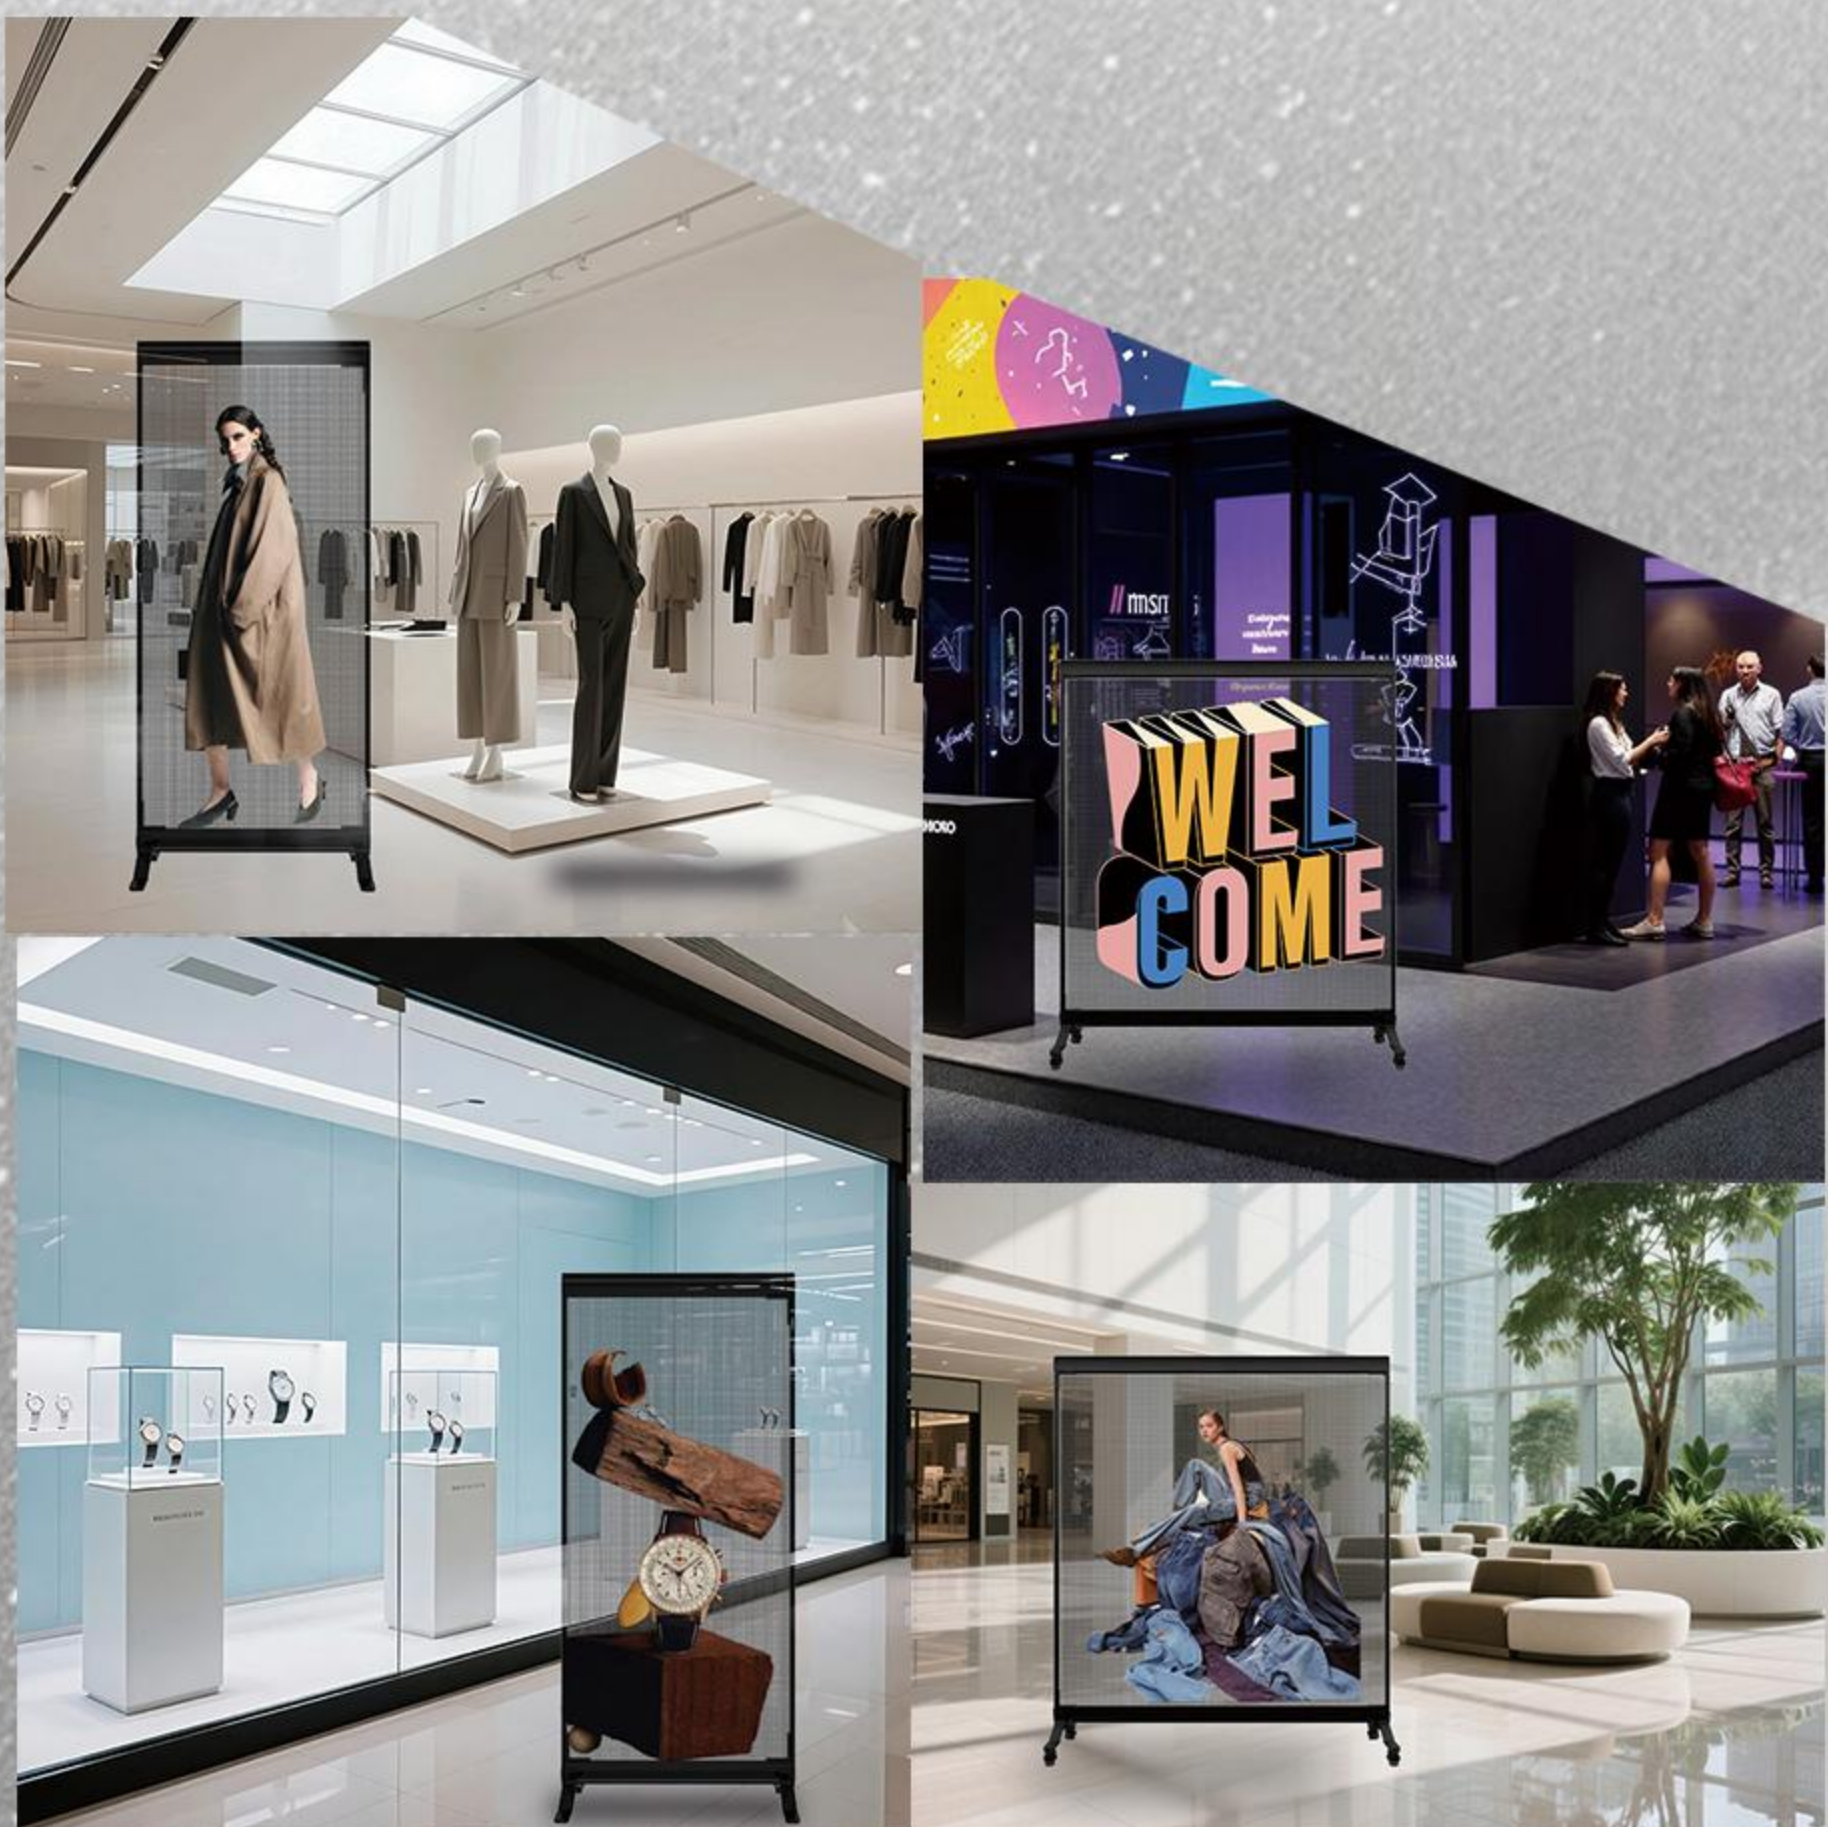

Features



Transparent Power, Limitless Vision

- T series can be mounted vertically or hoisted;
- All-aluminum frame, overall light, while at the same time with high strength, can be moved on wheels;
- Rigid structure design, ensuring stability and precision for flat surface installations.



Specification

T Series (Integrated light drive)

Module



Model Size	T3 - 4 - 2			T3 - 2 - 2			T3L - 4 - 2			T3L - 2 - 2		
Pixel Pitch	2.9 mm	3.91 mm	6.25 mm	2.9 mm	3.91 mm	6.25 mm	2.9 mm	3.91 mm	6.25 mm	2.9 mm	3.91 mm	6.25 mm
Pixel Density	112,896 dot/m ²	65,536 dot/m ²	25,600 dot/m ²	112,896 dot/m ²	65,536 dot/m ²	25,600 dot/m ²	112,896 dot/m ²	65,536 dot/m ²	25,600 dot/m ²	112,896 dot/m ²	65,536 dot/m ²	25,600 dot/m ²
Visual Transparency	80%		90%	80%		90%	80%		90%	80%		90%
Module Size	2000 mm × 2000 mm			1000 mm × 2000 mm			2000 mm × 2000 mm			1000 mm × 2000 mm		
Overall Module Size	2000 mm × 2200 mm × 55 mm			1000 mm × 2200 mm × 55 mm			2000 mm × 2400 mm × 500 mm			1000mm × 2400mm × 500 mm		
LED Type	1818	2121		1818	2121		1818	2121		1818	2121	
Weight	33.44 kg	31.84 kg	31.2 kg	20.82 kg	19.92 kg	19.59 kg	43.44 kg	41.84 kg	41.2 kg	26.82 kg	25.92 kg	25.59 kg
Resolution Ratio	672 × 672 pix	512 × 512 pix	320 × 320 pix	336 × 672 pix	256 × 512 pix	160 × 320 pix	672 × 672 pix	512 × 512 pix	320 × 320 pix	336 × 672 pix	256 × 512 pix	160 × 320 pix
LED Control System	Synchronous / Asynchronous											
Brightness	2500 nits	4000 nits	5000 nits	2500 nits	4000 nits	5000 nits	2500 nits	4000 nits	5000 nits	2500 nits	4000 nits	5000 nits
Viewing Angle	Horizontal 160, Vertical 140											
Display Thickness	1.5 mm	1.8 mm		1.5 mm	1.8 mm		1.5 mm	1.8 mm		1.5 mm	1.8 mm	
Playback Control	NOVA T50 / Colorlight input: HDMI、WiFi、Bluetooth、Built-in Playback System、32GB of storage、Cloud Management											
Resumable Transmission	√											
Average Lifespan	≥ 100,000 hours											
Gray Scale	≥16 bit											
White Field Color Temperature	5500K-15000K (adjustable)											
Atenuation Rate	2 years below 0.05%											
Average Fault-Free Working	≥ 100,000 hours											
Power Max/Average	865 W/m ² / 340 W/m ²	1200 W/m ² / 420 W/m ²	1600 W/m ² / 640 W/m ²	760 W/m ² / 270 W/m ²	1200 W/m ² / 420 W/m ²	1600 W/m ² / 640 W/m ²	760 W/m ² / 270 W/m ²	1200 W/m ² / 420 W/m ²	1600 W/m ² / 640 W/m ²	760 W/m ² / 270 W/m ²	1200 W/m ² / 420 W/m ²	1600 W/m ² / 640 W/m ²
Operation Temperature	-20°C ~ +50°C											
Working Humidity	20% RH ~ 85% RH, no condensation											
Storage Temperature	-20°C ~ +60°C											
Storage Humidity	10%RH ~ 85%RH, no condensation											
Installation Method	Wall mount installation, glass adhesive, hanging, stacking, suitable for curved installations, supports cutting to any size									Vertical		
Packaging Method	Cardboard Case/ Plywood Case / Flight Case											
Certifications	CE, FCC, ETL, RoHS											

